


Door & Gate Monitor

MMC-101 Roller Shutter

- Over Head Adjustable Type
- Magnetic Contact NC
- Standard Gap 60mm
- Dimensions : 68W x 14H x 27Dmm

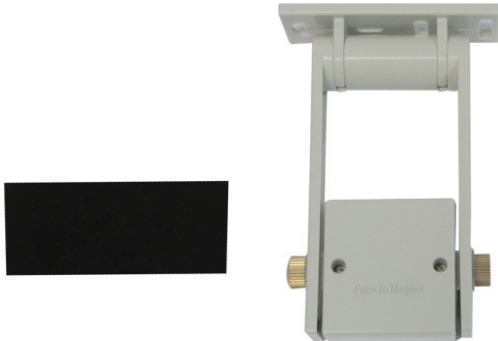

BSD-3011WG

- Magnetic Contact (NC)
- 18" Armored Cable, L Bracket Included
- Effective Action Distance : max. 75mm
- Dimensions : 106L x 38W x 10Hmm



BR-2071



- Magnetic Contact (NC)
- 18" Length Cable
- Effective Action Distance : max. 50mm
- Dimensions : 50L x 17W x 10Hmm

BR-2072



- Magnetic Contact (NC)
- 18" Armored Cable, L Bracket Included
- Effective Action Distance : max. 75mm
- Dimensions : 77L x 25.5W x 13.5Hmm

Key Switch

MKS-110



- Flat Key Switch NO/NC
- Europe Type Flush Mount
- Built-in Tamper Switch

MKS-120



- Round Key Switch NO/NC
- Europe Type Flush Mount
- Built-in Tamper Switch

MKS-132 DPDT

MKS-134 4PDT



- Round Key for ON/OFF
- Contact : 5A/250V
- Built-in Tamper Switch

Break Glass

MSA-230/ALARM



- Break Glass for Alarm
- Stainless Steel Panel
- Flush Mount Type

MSA-230/EMG



- Break Glass for Alarm
- Stainless Steel Panel
- Flush Mount Type