

MKP-6510

MKP-6510 is a PIEZO Surface Mount Keypad, which provide massive amount of data memorization. MKP-6510 contained the latest memory chips to memorize 600 set of 4-8 digit Pin Codes and 600 User Card; furthermore, specific integration circuit have been designed to ensure no data will be lost during any power outages. The smoothest plastic surface provided not just the comfortable touch, it could be easily install and match with any material surface without damaging the harmony of the original situation.




Features:

- 3 LED Display
- 125 KHz EM Card
- 600 User Card & PIN Code
- 2 Programmable Relay Output
- Door Monitor Function
- AC/DC12-24V
- Alarm Signal Output
- IP65

ELECTRICAL CHARACTERISTICS	
Power Input	12 to 24V DC or AC, from a power supply
Maximum Input Current	170 mA at 12V DC
Standby Input Current	100 mA at 12V DC
Relay Output Loading	Max 3 Amps Normally Open or Normally Closed (Lock & Aux. Relays)
AL-Output Loading	Max. 500mA at 12 VDC
OPERATIONAL CHARACTERISTICS	
P.B. Input (REX)	Normally Open (Dry Contact) for activating the lock relay
REED Input	Normally Close (Dry Contact) for door monitoring
Capacity	600 User Card & PIN Code
LED Indication	3 LEDs: Power/Program, Lock Out and Aux Out status
ENVIRONMENTAL CHARACTERISTICS	
Operating Environment	IP 65
Operating Temperature	-20°C to 60°C
Operating Humidity	0 to 95% Non-condensing
PHYSICAL CHARACTERISTICS	
Dimensions	79 (W) x 125 (H) x 28.5 (D) mm
Weight (Approx.)	550 g

MKP-6510

Structure Diagram

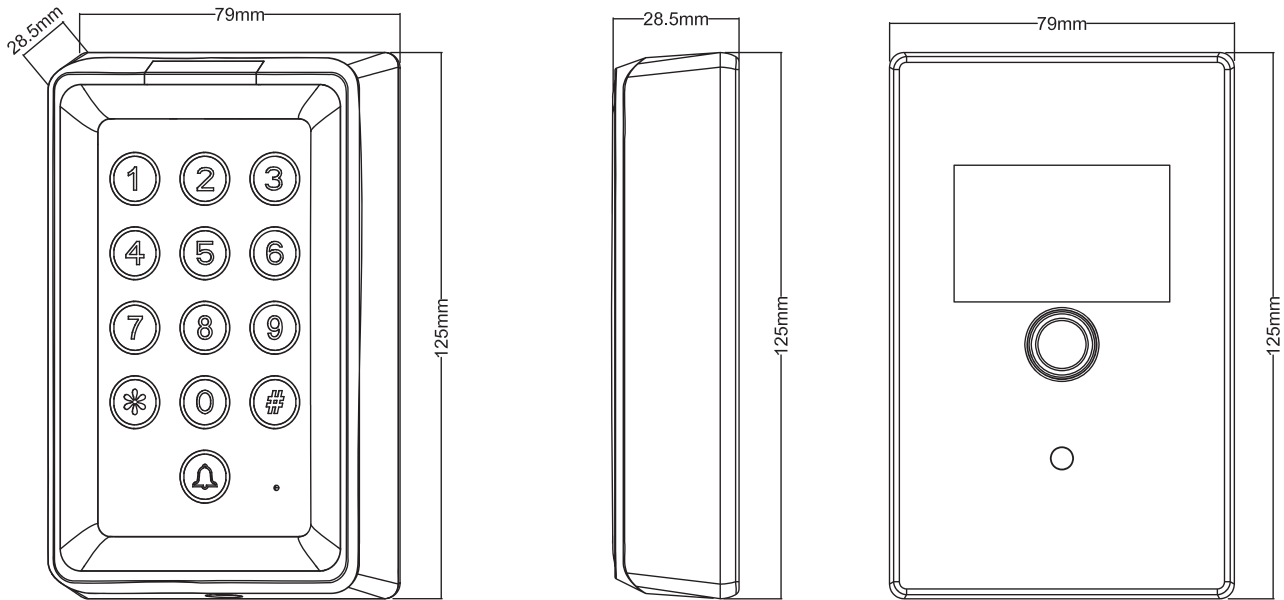

Related Product



MDF-110 IR Series

- Power Input : DC 12V
- Contact : 125V/3A, NO/NC
- IR Sensor for Door Release
- Built-in Emergency Button
- Latch or Timer Output



MT-123 E - Lock Power Supply

- Power Input : AC220V
- DC Output : DC12V & 0.5A
- N.D. Output : 12V 2A
- N.C. Output : 12V 1A
- Timer : 0-20 sec



BR-2072 Door & Gate Monitor

- Magnetic Contact (NC)
- 18" Armored Cable
- L Bracket
- Action Distance: max. 75mm
- Size: 77L x 25.5W x 13.5H mm



MSA-42 Mechanical Button

- Power Input : DC 12-24V
- Illuminated Button
- Contact Rated: DC 30V/0.1A
- Stainless Steel Faceplate

Additional Information

Please visit our Web page for more information: www.mitec.com.hk