

MKP-3310

MKP-3310 is a standalone keypad with zinc housing that creates contrast between the stainless steel panel, buttons and the housing. Which gives a different outfit and created a more meticulous atmosphere for the surrounding area. Also the zinc housing provided better protecting for the panel and those back-light laser cut buttons. The surface mount design for MKP-3310 makes it easy to fit in any situation and still keep the continuance between the keypad and the original environment.




Features:

- 3 LED Display
- 99 Pin Code (4-8 Digit)
- Backlight Key
- 2 Programmable Relay Output
- Door Monitor Function
- Alarm Signal Output
- IP65
- AC/DC12-24V

ELECTRICAL CHARACTERISTICS	
Power Input	12 to 24V DC or AC, from a power supply
Maximum Input Current	140 mA at 12VDC
Standby Input Current	45 mA at 12VDC
Relay Output Loading	Max 3 Amps Normally Open or Normally Closed (Lock & Aux. Relays)
AL- Output Loading	Max. 500mA at 12 VDC
OPERATIONAL CHARACTERISTICS	
P.B. Input (REX)	Normally Open (Dry Contact) for activating the lock relay
REED Input	Normally Close (Dry Contact) for door monitoring
Pin-Codes	99 PIN Codes (4 - 8 Digit)
LED Indication	3 LEDs: Power/Program, Lock Out and Aux Out status
ENVIRONMENTAL CHARACTERISTICS	
Operating Environment	IP 65
Operating Temperature	-20°C to 60°C
Operating Humidity	0 to 95% Non-condensing
PHYSICAL CHARACTERISTICS	
Dimensions	79 (W) x 120 (H) x 35 (D) mm
Weight (Approx.)	540 g

MKP-3310

Structure Diagram

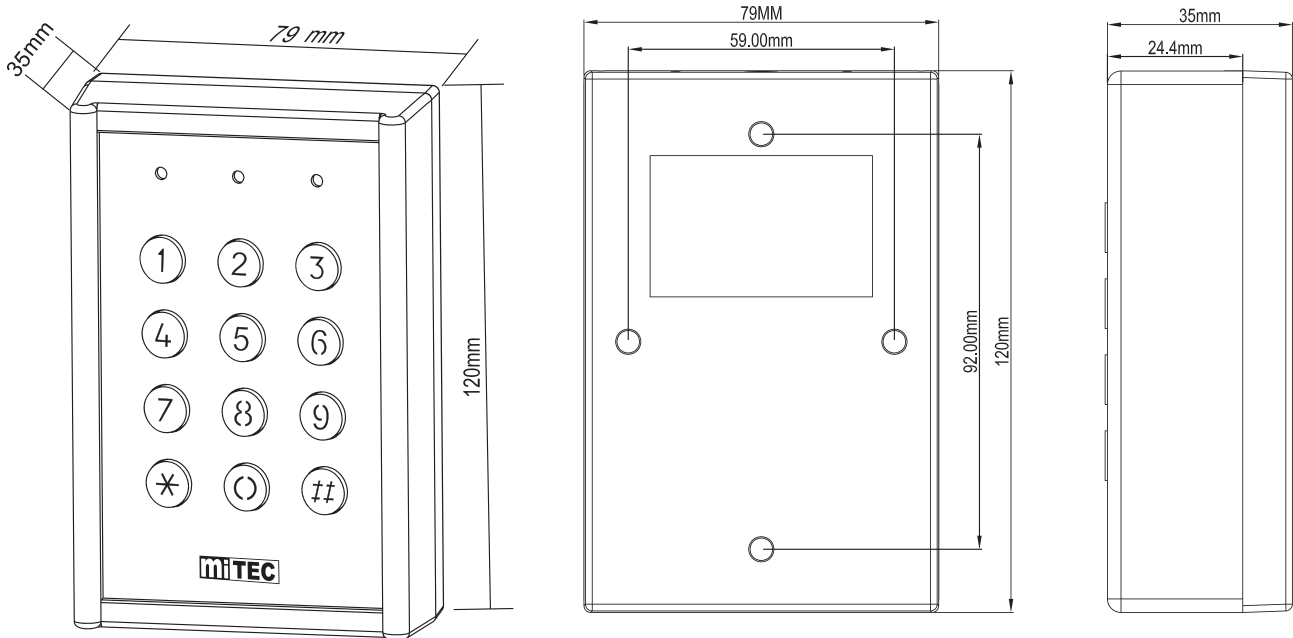

Related Product



- MSP-125T**
E - Lock Power Supply
- Universal AC Input
 - Regulated DC13.8V Output
 - 5A current Output
 - Timer : 0~30 sec



- BSD-3011WG**
Door & Gate Monitor
- Magnetic Contact (NC)
 - 18" Armored Cable
 - L Bracket Included
 - Action Distance: max. 75mm
 - Size: 106L x 38W x 10H mm



- MDR-216/UK**
Doom Exit Button
- SPDT Micro Switch
 - ABS Plastic Panel
 - With Surface Mount Box
 - Back Light (DC 12V)



- MDR-381 Series**
Siren with LED Flash Lamp
- LED Flash Lamp (Built-in Buzzer)
 - Red/Green/Yellow/Blue Color
 - Power Input: DC 12-24 V
 - Size: ø 90 x 86H mm

Additional Information

Please visit our Web page for more information: www.mitec.com.hk